

AMP-TRAP AG FUSES FIT RIGHT IN TO A WIDE VARIETY OF INDUSTRIAL APPLICATIONS

The Ferraz Shawmut Amp-trap AG fuse series is a complete line of Class G fuses. AG fuses safely fit a wide variety of applications. Class G fuses are made in four physical sizes and provide good branch-circuit protection for lighting, heating, and appliance circuits.

B

Features/Benefits

- **Four unique sizes** from 1/2-60 amperes do not allow inter-changeability with other fuse classes
- **Fiberglass bodies** provide dimensional stability in harsh industrial settings

HIGHLIGHTS:

- Current-Limiting
- Time Delay (above 5A)

APPLICATIONS:

- Lighting
- Heating*
- Appliances
- Branch Circuits

Ratings

- **AC:** 1/2 to 20A
600VAC, 100K A I.R.
25 to 60A, 480VAC,
100k A I.R.

Approvals

- UL Listed to Standard 248-5 File E2137
- CSA Certified to Standard C22.2 No. 248.5



* Except in Canada, where fuses must be "P" or "D" type.

Standard Fuse Ampere Ratings, Catalog Numbers


| AMPERE RATING | CATALOG NUMBER | AMPERE RATING | CATALOG NUMBER |
|---------------|----------------|---------------|----------------|
| 1/2 | AG1/2 | 15 | AG15 |
| 1 | AG1 | 20 | AG20 |
| 1-1/2 | AG1-1/2 | 25 | AG25 |
| 2 | AG2 | 30 | AG30 |
| 3 | AG3 | 35 | AG35 |
| 4 | AG4 | 40 | AG40 |
| 5 | AG5 | 45 | AG45 |
| 6 | AG6 | 50 | AG50 |
| 8 | AG8 | 60 | AG60 |
| 10 | AG10 | | |

Dimensions

| AMPERE RATING | A | | B | | C | |
|----------------|------|------|------|------|-----|------|
| | In. | mm | In. | mm | In. | mm |
| 1/2-15A | 1.31 | 33.3 | .406 | 10.3 | .28 | 7.1 |
| 20A | 1.41 | 35.8 | .406 | 10.3 | .28 | 7.1 |
| 25, 30A | 1.62 | 41.2 | .406 | 10.3 | .28 | 7.1 |
| 35-60A | 2.25 | 57.2 | .406 | 10.3 | .50 | 12.7 |

Cross Reference:


AG will replace the following fuses: Bussmann SC, Littelfuse SLC

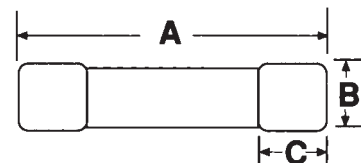


TIME DELAY/CLASS G FUSES

AG

AG1 to 10

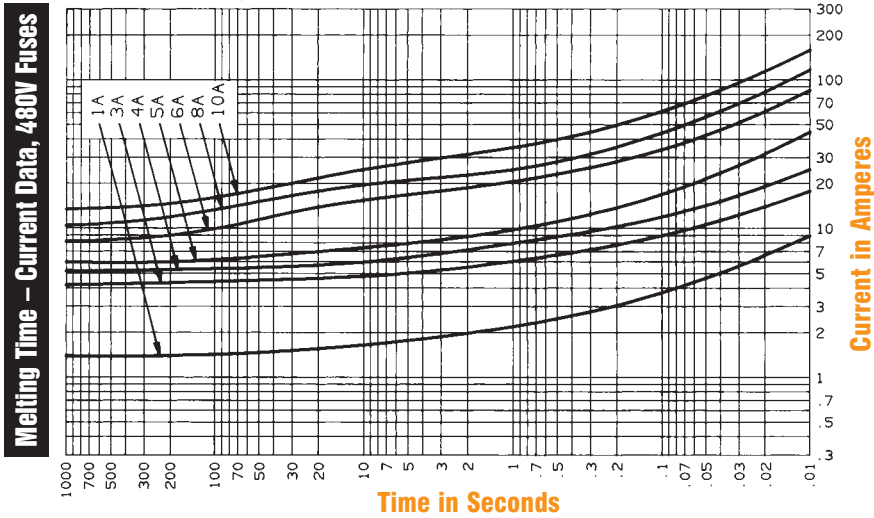

AG15 to 60

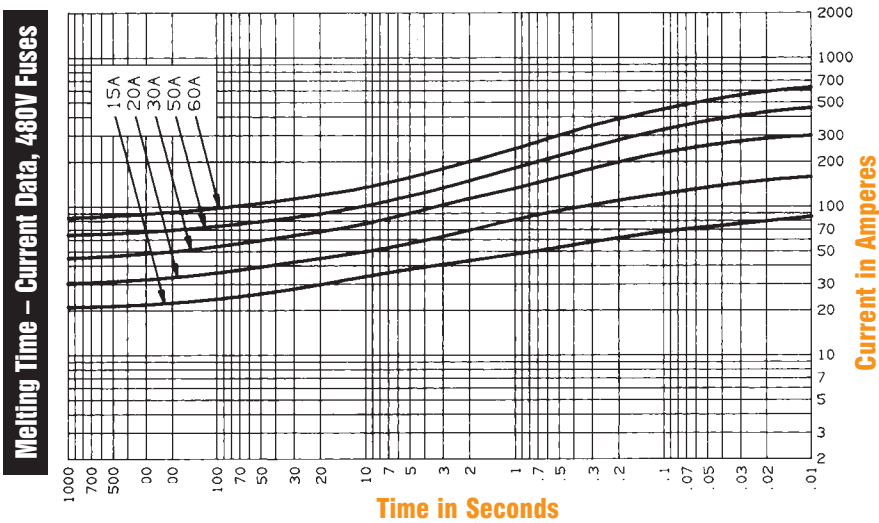

Maximum Instantaneous Peak Let-Thru Amperes

